

Sewer lateral connection

1. MATERIALS:


- A. SRD or PVC wye for clean outs and angels.
- B. SRD or PVC pipe for laterals.

2. INSTALLATION:

- A. Cleanout location 100 ft. max for residential laterals.
- B. Cleanout location 50 ft. max for commercial laterals.
- C. Cleanouts shall be installed at each fitting with a change in direction more than 45 degrees unless the length of pipe is 40 ft. or less.
- D. Cast iron or brass cleanout plug.

3. INSPECTION:

- A. For inspection call 24 hr. in advance.
- B. Have sewer pipe bedded in sand or gravel.
- C. Have top of pipe exposed to check grade.

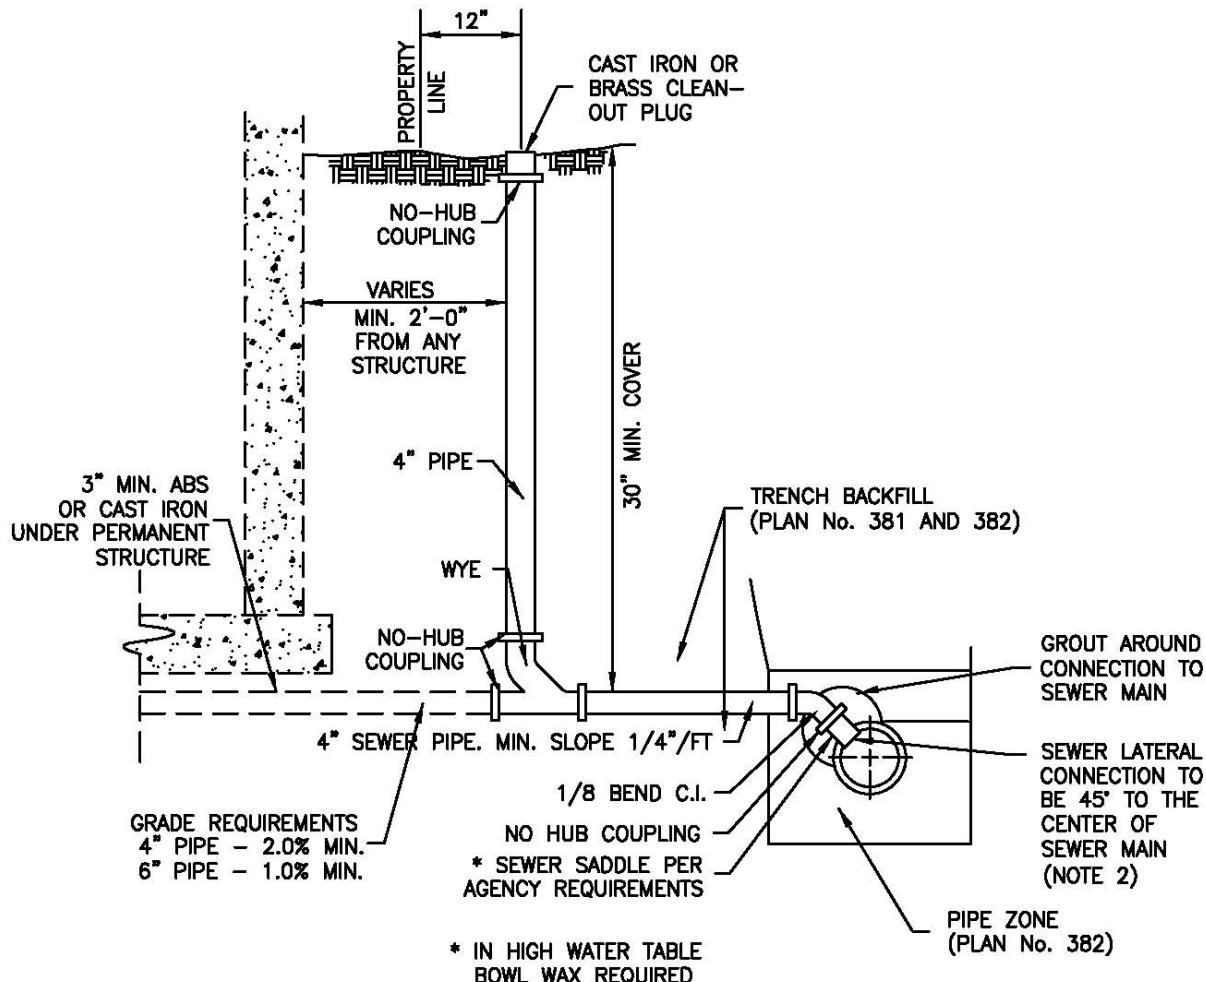

SECTION